



| GENSET MODEL | | HLS 7.5 | |
|--------------------|-----|---------|------|
| Engine speed | rmp | 1500 | 1800 |
| Frequency | Hz | 50 | 60 |
| Rated power | KVA | 7.5 | 8.5 |
| | KW | 6 | 6.8 |
| Gross Engine Power | KW | 8.2 | 10.2 |
| | hp | 11 | 13.7 |

*Ratings at 0.8 Power Factor


Prime Rating: These ratings are applicable for supplying continuous electrical power in Lieu of Commercially purchased power. This model can supply 10% overload for 1 hour In 12 hours.

Standby Rating: These ratings are applicable for supplying continuous electrical power in the event Of utility power failure. No overload is permitted on these ratings.

| FUEL CONSUMPTION | | | |
|------------------|--------|-----|-----|
| @50% load | L / hr | 1.2 | 1.5 |
| @75% load | L / hr | 1.5 | 1.9 |
| @100% load | L / hr | 1.9 | 2.3 |

| TECHNICAL DATA | | |
|---------------------------|-----------|-------|
| Lister Peter Engine Model | LPW2 | |
| Stamford Alternator Model | BAC 164C | |
| Number Of Cylinders | 2 in line | |
| Cubic Capacity | Liters | 0.93 |
| | cu . in | 56.75 |
| Bore | mm | 86 |
| | in | 3.35 |
| Stroke | mm | 80 |
| | in | 3.12 |
| Fuel Tank Capacity | lit | 40 |

| DIMENSIONS & WEIGHT | | |
|---------------------|----|-----|
| Length | cm | 115 |
| Width | cm | 52 |
| Height | cm | 110 |
| Weight | kg | 340 |

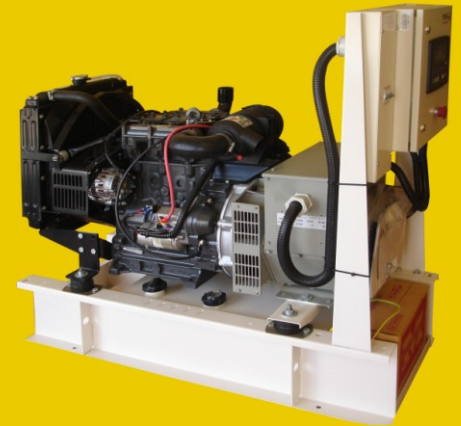

HLS 7.5